

Features

- ▶ Wavelength 405nm
- ▶ Stable Output power 5mW
- ▶ Basic Water proof
- ▶ DC 7~24V DC
- ▶ Wire : 30cm(standard) or custom

◆ Option : Bracket & Power supply(100~240V)

Specification

● Optical

Output Power (mW)	5 (Tc=25°C)
LD power (mW)	7 (Max)
Wavelength (nm)	405 ±10
Collimated Beam Size (mm)	3x2 (at 10m)
Beam Quality	TEM00
Beam intensity Pattern	Gaussian

● Electrical

Operating voltage(DC V)	7~24 ± 5%
Operating current(mA)	70 (Typ.)
Drive circuit	ACC
Operating Temp.(°C)	-10 ~ +60
Storage Temp.(°C)	-40 ~ +85


● Mechanical

Weight (g)	40 ± 0.5
Dimensions(mm)	25Φ X 90
Housing material	Aluminum

Application

- Alignment
- Scientific delevopement

Drawings

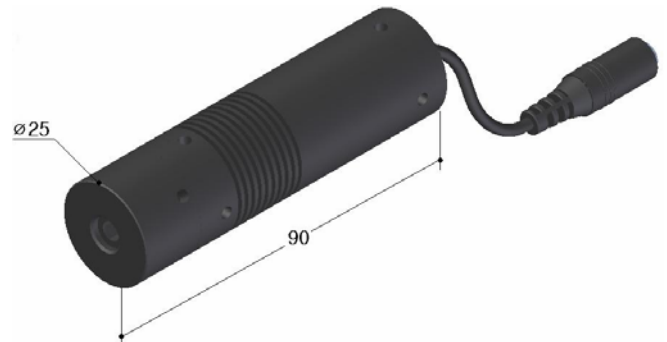

Lanics Co., Ltd.

Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260

E-mail : support@lanics.com
[http:// www.lanics.com](http://www.lanics.com)