

Features

- ▶ Typical wavelength, 655nm
- ▶ Stabilized optical power 1mW
- ▶ Single supply voltage, 5V DC
- ▶ Low power consumption
- ▶ **Built-in waterproof equipment**
- ▶ Attached deflection lens (-)
- ▶ Wire length : 30cm(standard) or custom
- ▶ A use of near distance
- ▶ Laser class : II
- ◆ **Option : Bracket & Power supply.**

Specification

Optical

Optical power(mW)	1 (Tc=25°C)
LD power(mW)	5 (Max)
Output Efficiency(%)	20
Wavelength(nm)	655 ±5
Collimated Beam Wid(mm)	<1.5 (at 2m)
Fan Angle (°)	60
Line Pattern	Accurate Straight
Beam Quality	TEM00
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Positive

Electrical

Operating voltage(DC V)	5 ± 5%
Operating current(mA)	60(Max)
Operating Temp.(°C)	-10 ~ +50
Storage Temp.(°C)	-40 ~ +85


Mechanical

Weight(g)	13 ± 0.5
Dimensions(mm)	12Φ X 40
Operating lifetime(h)	30,000 ~ 50, 000(@RT)
Housing material	Aluminum

Description

The NDE series laser diode module combines laser diode technology, quality optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. This series of modules provides elliptical laser beam in variety power and wavelengths. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

Drawings

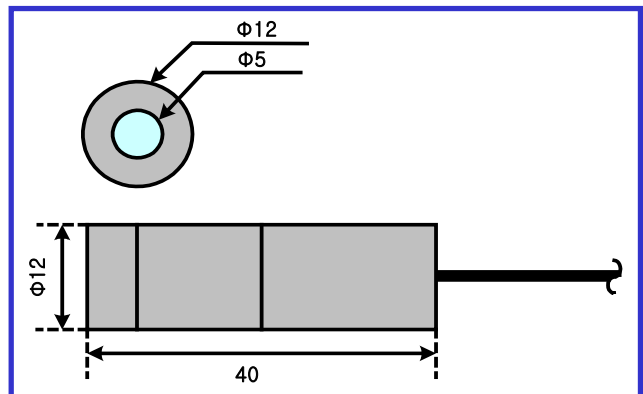

* Line length by distance

Distance (mm)	Line length (mm)
100	120
300	350
500	580
1000	1150

Lanics Co., Ltd.

Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260
E-mail : support@lanics.com
http:// www.lanics.com