

Features

- ▶ Typical wavelength, 808nm(Invisible)
 - ▶ Stabilized optical power 50mW
 - ▶ Single supply voltage, 5V DC
 - ▶ Modulation : digital, analog ~300KHz
 - ▶ Low power consumption
 - ▶ Over current protection
 - ▶ Wire length : 30cm(standard) or custom
 - ▶ Laser class : 3B (IEC 60825-1)
- ◆ Option : Bracket & Power supply.

Specification

Optical

Optical power(mW)	50 (Tc=25°C)
LD power(mW)	200 (Max)
Wavelength(nm)	808 ±15
Focus Beam Dia(mm)	0.2x0.1(at 300mm)
Collimated Beam Dia(mm)	3x2(at 10m)
Collimated Beam Div(mrad)	<0.5
Beam Quality	TEM00, M ² <1.2
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground

Electrical

Operating voltage(DC V)	5
Operating current(mA)	100(Typ.)
Operating Temp.(°C)	-10 ~ +50
Storage Temp.(°C)	-40 ~ +85


Mechanical

Weight(g)	22 ± 0.5
Dimensions(mm)	Φ14 X 56.5
Operating lifetime(h)	30,000~50,000(@RT)
Housing material	Aluminum

Description

The LM-7805MH laser diode module combines laser diode technology, quality optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. This module provides a infrared(785nm) elliptical laser beam. Applications include a measurement, positioning, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

Drawings

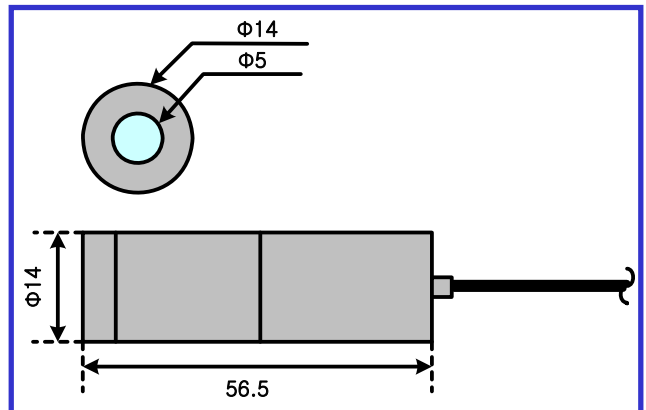

Lanics Co., Ltd.

Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea
TEL : +82-2-2108-2255 FAX : +82-2-2108-2260

E-mail : support@lanics.com
[http:// www.lanics.com](http://www.lanics.com)