

Features

- ▶ Typical wavelength, 655nm
- ▶ Stabilized optical power 1mW
- ▶ Single supply voltage, 5V DC
- ▶ Collimated laser beam
- ▶ Low power consumption
- ▶ Digital modulation function
- ▶ Wire length : 30cm(standard) or custom
- ▶ Laser class : II

◆ Option : Bracket & Power supply.

Specification

● Optical

Optical power(mW)	1 (Tc=25°C)
LD power(mW)	5 (Max)
Output Efficiency(%)	20
Wavelength(nm)	655 ±5
Focus Beam Dia(mm)	Φ0.15(at 300mm)
Collimated Beam Dia(mm)	3x2(at 10m)
Collimated Beam Div(mrad)	<0.5
Beam Quality	TEM00, M ² <1.5
Beam intensity Pattern	Gaussian
LD Pin Connection	Case Ground Case Positive

● Electrical

Operating voltage(DC V)	5 ± 5%
Operating current(mA)	50(Max)
Operating Temp.(°C)	-10 ~ +40
Storage Temp.(°C)	-40 ~ +85


● Mechanical

Weight(g)	12 ± 0.5
Dimensions(mm)	Φ12 X 41.5
Operating lifetime(h)	30,000(@RT)
Housing material	Aluminum

Description

The NA series laser diode module combines laser diode technology, quality optics, and sophisticated electronics within a slim and light aluminum anodized housing for variety of applications. This series of modules provides a elliptical laser beam in a variety of power and wavelength. Applications include a measurement, positioning, lighting, alignment, guidelines, pointing, switching, leveling, and machine vision etc. Useful in a variety of medical, industrial, and scientific instrumentation, as well as general R&D work.

Drawings

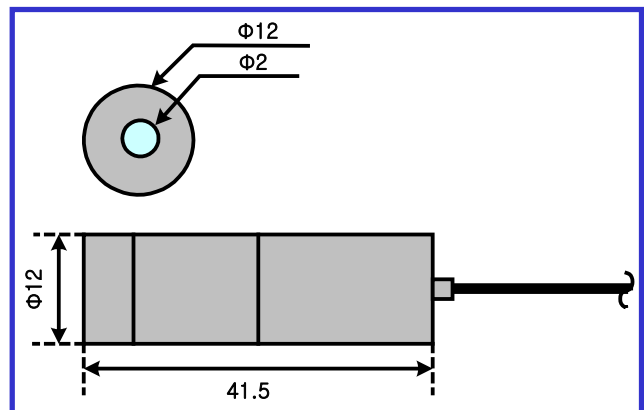

Lanics Co., Ltd.

Room #703, 7F Woolim e-Biz Center
170-5, Guro-dong, Guro-gu, Seoul, 152-050, Korea

TEL : +82-2-2108-2255 FAX : +82-2-2108-2260

E-mail : support@lanics.com

http:// www.lanics.com